




**HITECH**

**INTERIOR DOORS -- COLLECTION**

Perfect in form and function.



## Customizable & Suggestion

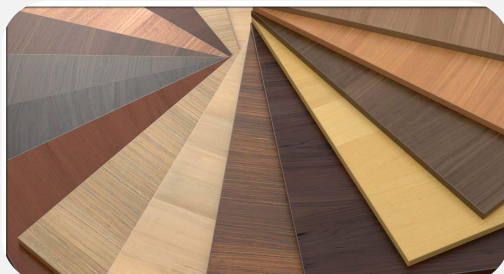

Hitech focus on the production of full series door. We provide engineering and household clients with high-quality, cost-effective, and complete series products. In terms of service, we provide various program customizations such as category materials, structures and designs.



## Melamine & Painting

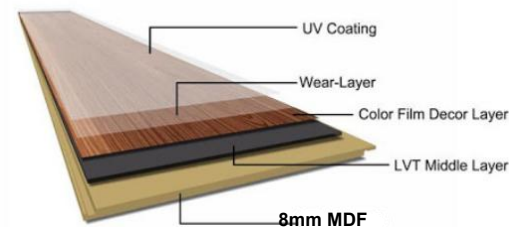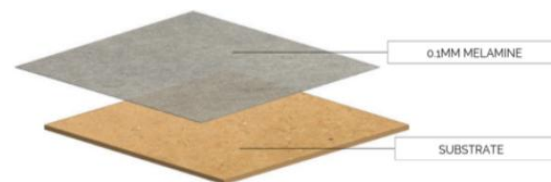

SUNPROOF



EASY CLEAN



WATER PROOF



TEMPERTURE PROOF



DURABLE



KEEP WARM



FRIENDLY ENVIRONMENT



## PURE COLOR SERIES



HT01

Lacquer / Melamine door  
White is not always white



HT02




Hitech support pure color customization in RAL color or Benjamin Moore paint color



Door leaf + door frame + door architrave form a unit

# DECORATION STRIP/GROOVE DESIGN

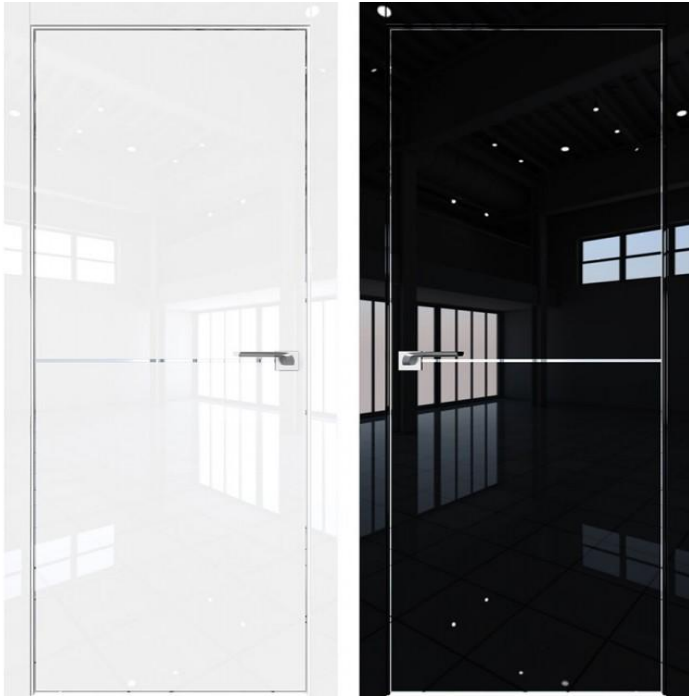


HT03



High gloss door with piano paint, make internal decoration more special and slight luxury



HT04

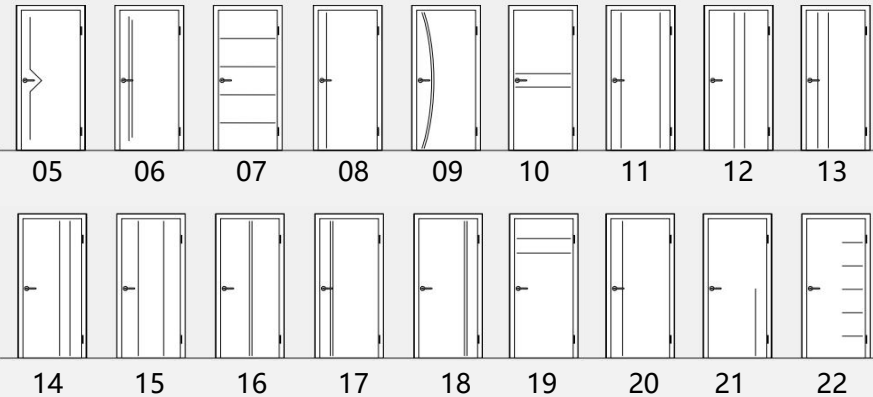


Line with aluminum strip or crystal paint filling



White



Black



None



# DECORATION GLASS DESIGN



HT23



HT24

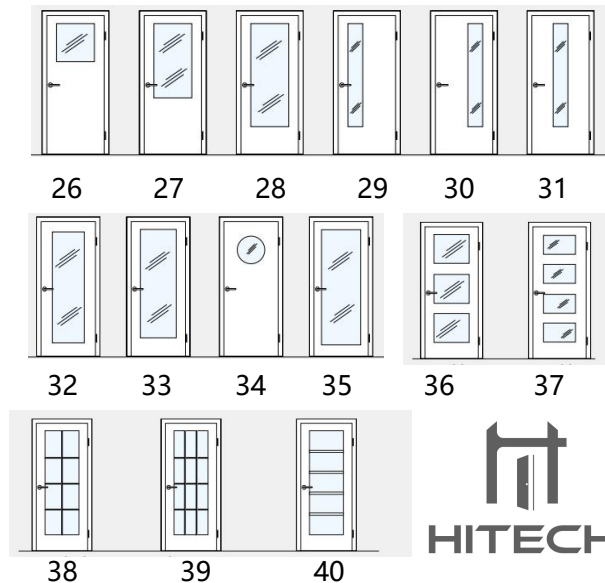

Door leaf with light cutout, glazing bead type L




Clear glass



Frosted glass



Coated glass



Glass in the recessed door leaf.

Glass thick chosen: 5/8/10mm



HT25

Platen technology



HT41



HT43




HT44

Deep press/engraving



HT42

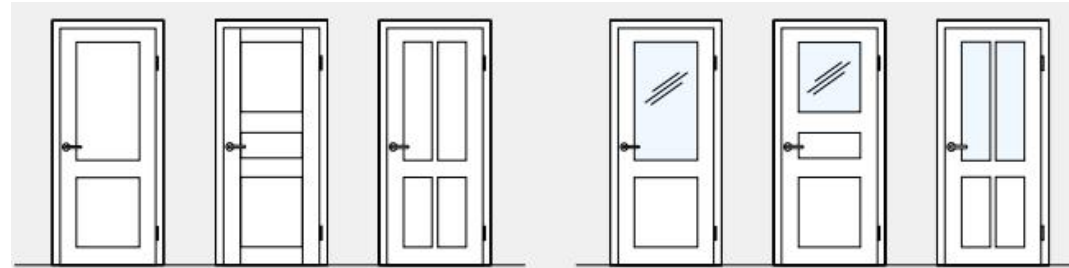

45

46

47

48

49

50




HT51






HT52

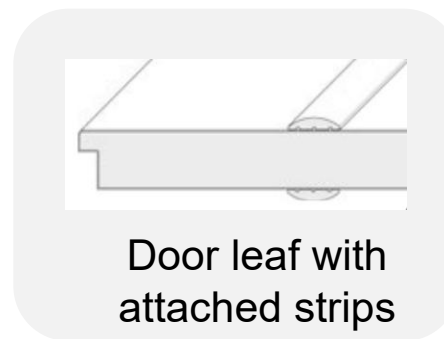


HT53

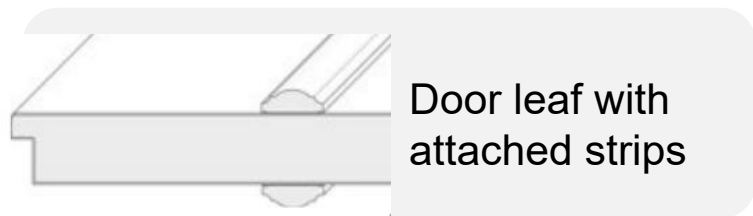





## DOOR OPENING TYPES




A-swing unequal

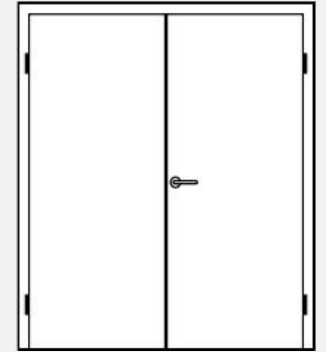

B-swing double

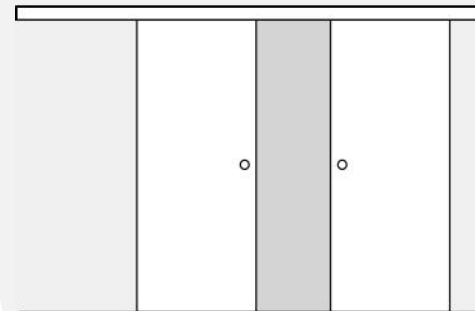

C-sliding barn door

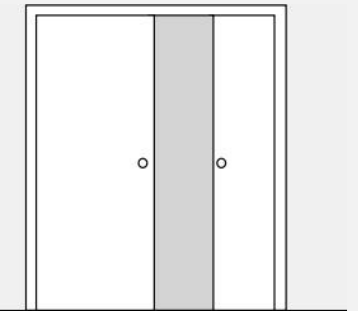

D-sliding pocket door

According to the size of the rough opening, you can choose the way you like to open the door, whether it is swing type of single door / double door/unequal door, sliding type of barn door /pocket door, we can customize it for you



# WOOD GRAIN SERIES-MELAMINE

(Hi, we can make by natural veneer as well!)



YH54



BMSD



YH55



MSQD

Color selection



MKAY



BHDX



HGLY




MKAY



SXT

BMSD



YLHT



XCM



62




HYNH



63



XHCG



64



YBFQ

# ALUMINUM DECORATE STRIP DESIGN



903



58



607



705



668



702



905



309



83



206



701



77




87



01



17

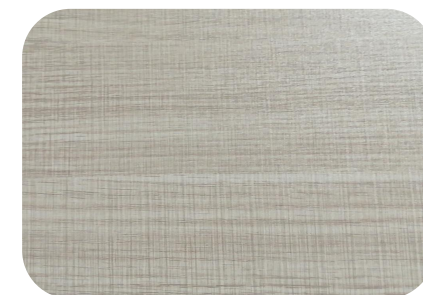



XYLS




LGSY



HYNH



HT68

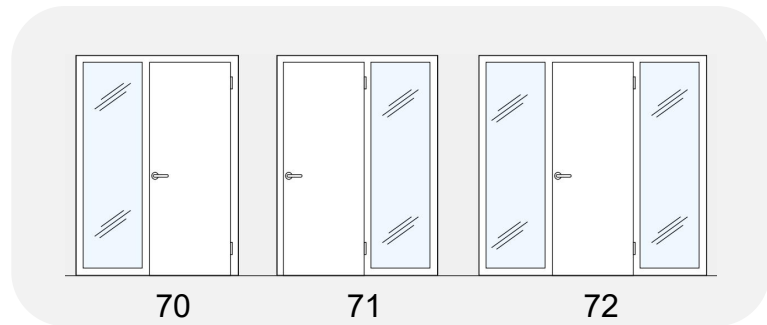

70

71

72



73

74

75

76



HT69



# ALUMINUM SILENT WOODEN DOOR SERIES

By upgrading the wooden door, the transition layer is upgraded from MDF material to Plywood material. The edge sealing around the door leaf is covered with aluminum alloy. At the same time, the aluminum alloy door frame replaces the wooden door frame. Functionally, the wooden door is more waterproof, more stable, and has a longer service life. In appearance, it adds the unique modernity of metal to the existing classic sense of wood.



HT77



The style collision of stone veneer and metal frame



79



80



81



82





## Hitech Innovative structure make your door stronger

High hardness, good gloss, no deformation, anti-aging. Through secondary processing, the weight of wood can be reduced by 40%-50%. Reduce wood stress and make the structure more stable. Double X mechanical structure increases the elastic coefficient of wood in the vertical direction by more than eight times.


High-strength colorful finish

S-mechanical structure

Solid wood LVL structure



Aluminum door frame with 45 degree cutting edge




Upgraded version of sound insulation tape edge



HT83



# OVERAL DECORATION CUSTOMIZED-INVISIBLE DOOR

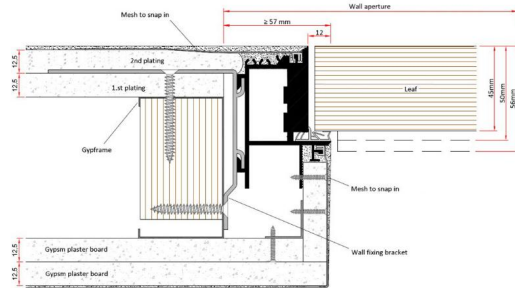

Not only limited to the white door hidden in the white wall, more wall panels with wood grain color choices, so that the door and the wall are truly integrated and more invisible

## Aluminum frame invisible door

(The structure diagram is for reference only, and aluminum frame profiles are recommended according to the actual situation)



Support wall panel customization



HT84

SQ-8008  
产品编号  
球林定制



## WOOD GRAIN SERIES-NATURAL VENEER




HT85

Horizontal veneer



HT86

Vertical veneer

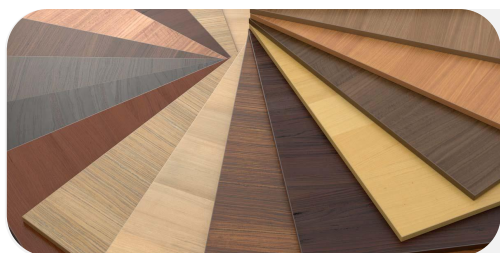

Finish with veneer painting process, high class for home/hotel/villa/high end project.




The horizontal and vertical grain natural veneer texture brings you a different natural feeling



HT92



HT93



88



89



90






Barn door type



Pocket door type

Selection of color

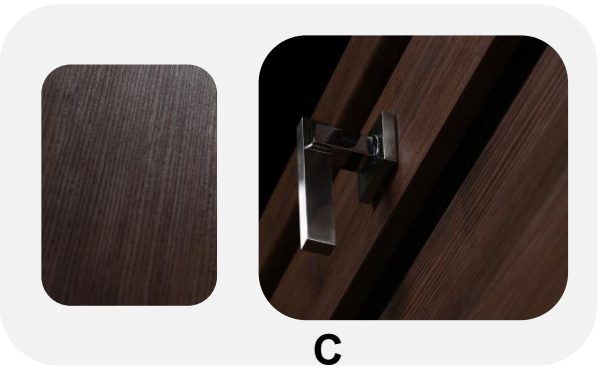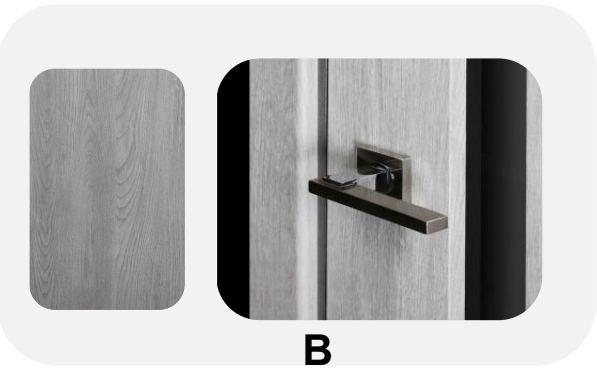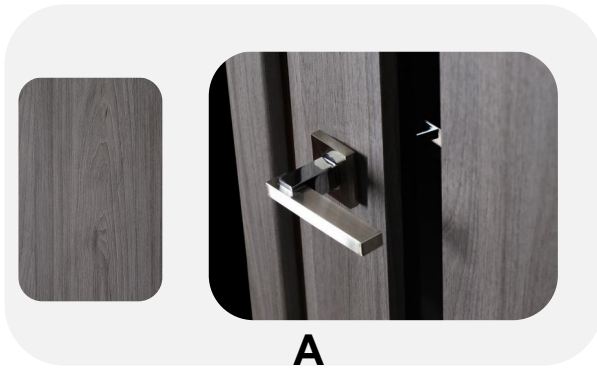




HT88

YH93



Silver Apricot Riv-34

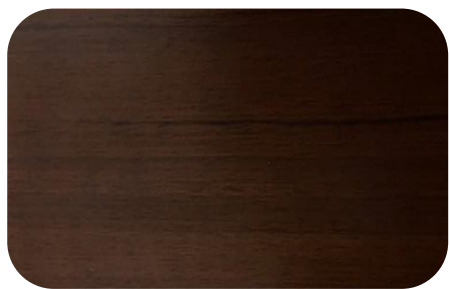

Teak wood



HT89

# HOT SALE BLACK WALNUT VENEER DESIGN




HT90



HT91



HT92

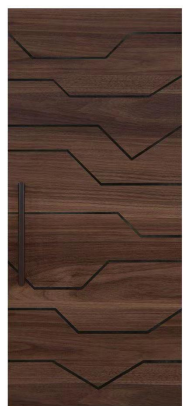

HT93




HT94



HT95





5mm width  
line+3mm groove  
effect

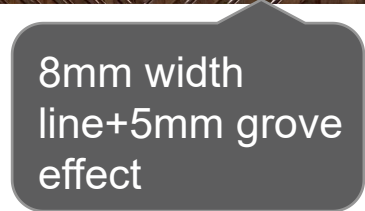

8mm width  
line+5mm groove  
effect




More design waiting for your share,we will will support custom solutions for you!

# HEIGH CLASS - NATURAL VENEER

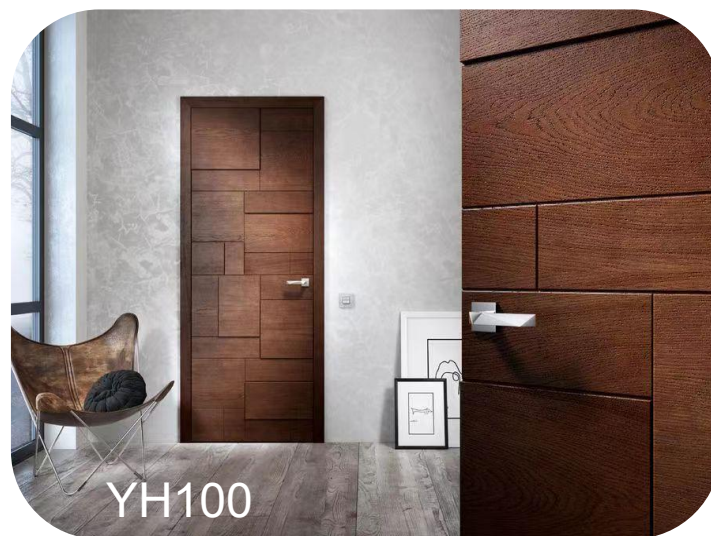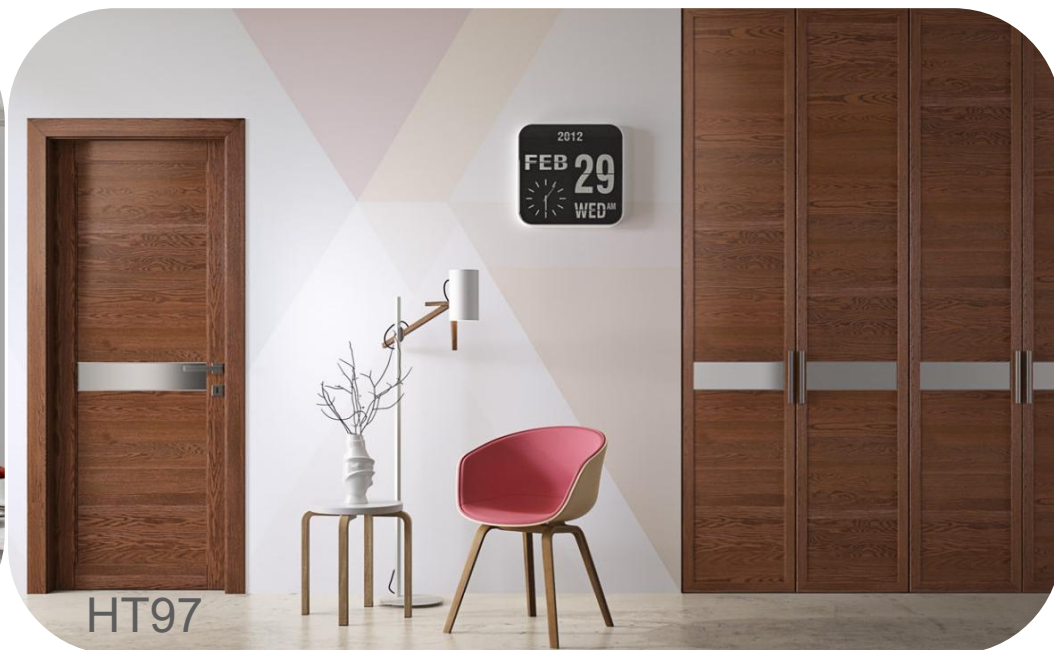



# GOST/MAGIC SLIDING DOOR

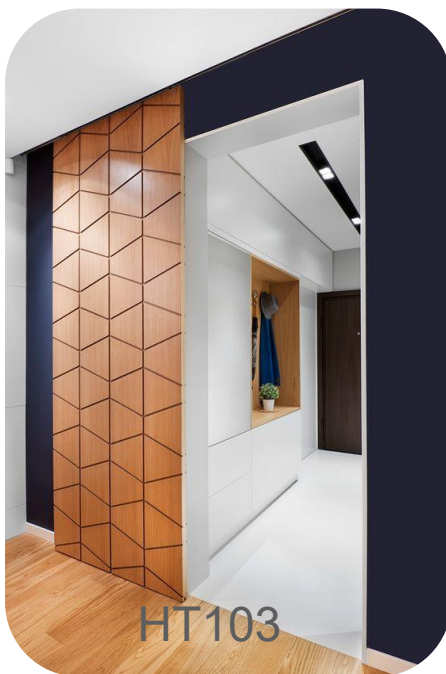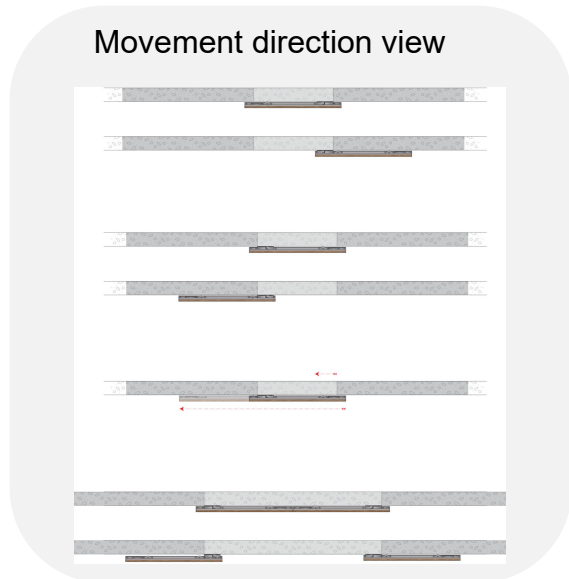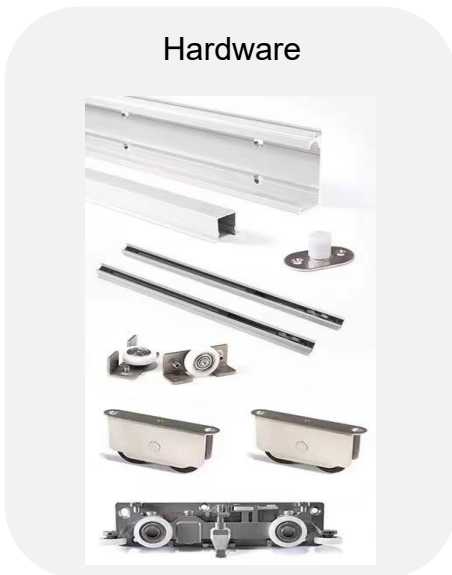

# FUNCTIONAL DOOR--DESIGN CUSTOMIZABLE



Fire certificate: 30min,60min,120min



Smoke protection



Fire protection



Burglar resistance



Soundproof




House garage doors are recommended use firerate at 30/60 minutes




Wherever people come together, at home, at work, in hotels or public buildings, safety comes first. You don't have to expect the worst, but tested and approved fire protection doors are extremely reassuring. Preserve, secure and protect. It is our job to implement this function in the best possible way.

## Part of drawing display

Drawings on the specimen provided by the Sponsor (1)

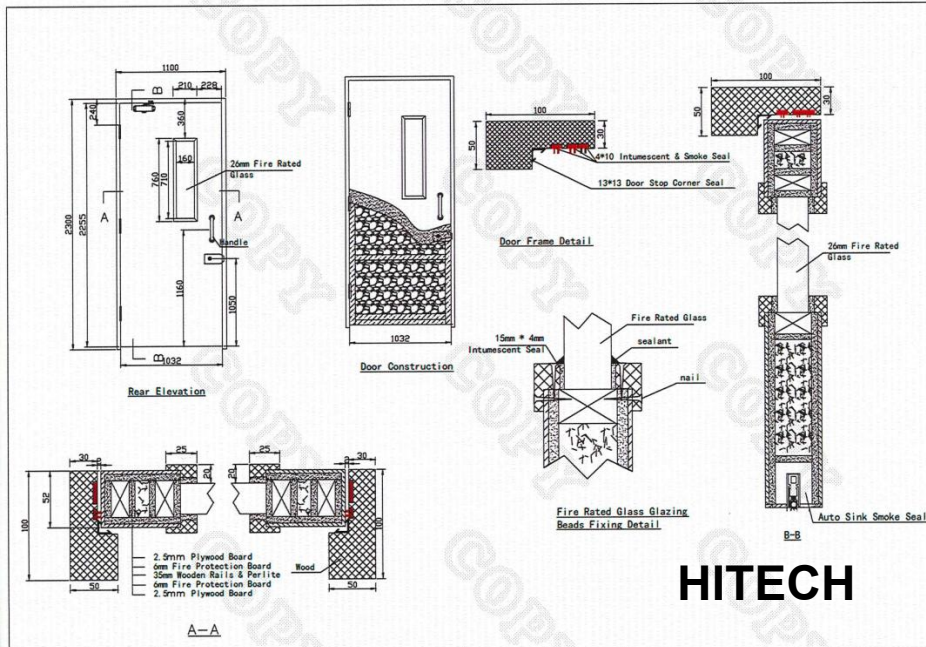

## Fire proof door leaf structure

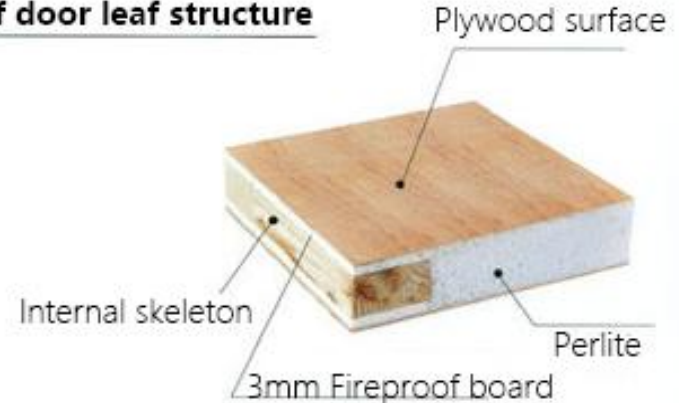

## Fire proof door frame structure





# WATER FUNCTION DOORS

-Damp room / wet room



Damp-proof doors type A(Plywood): Recommended for general Sanitary areas in private buildings with humidity.

Damp-proof doors type B(HDF): Recommended for general Sanitary areas in private or public buildings with high humidity.

Wet room doors(WPC): Recommended for rooms with very high humidity and with frequent splashing water or other direct exposure to moisture





# FUNCTIONAL DOOR




**Anti-bacteria**



**Easy to clean**



**20mins fireproof**

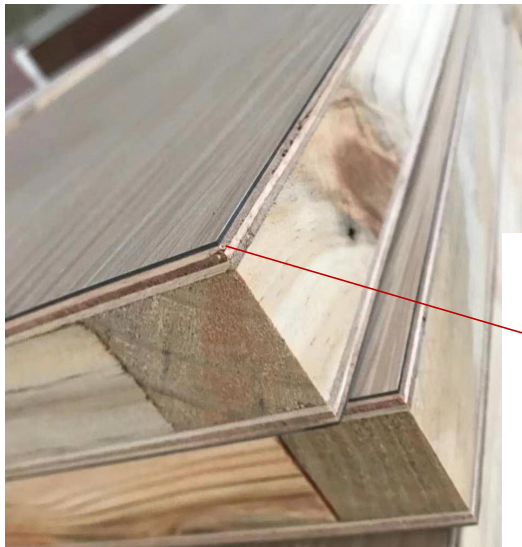

**High Pressure Laminate**




Mostly use for hospital for anti-bacterial, easy to clean and 20mins fireproof


# DOOR HOLE SIZE MEASUREMENT GUIDANCE




Take the minimum value    Take the minimum value    Take the maximum value

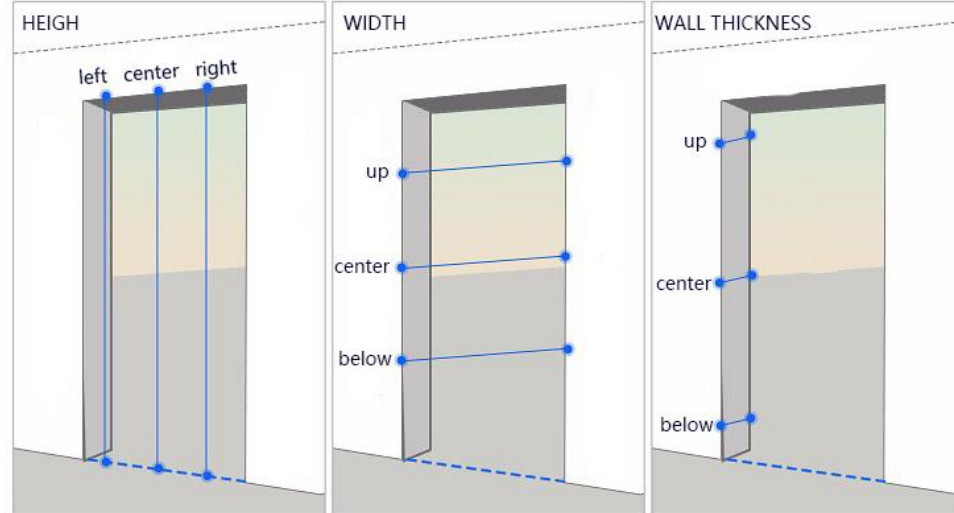

Notice: The length and width of the error exceeds 20mm need to be adjusted

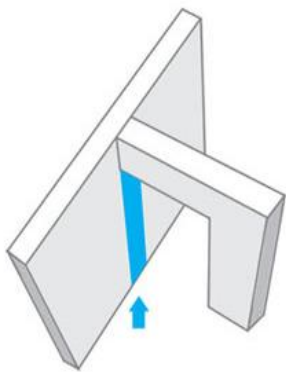

T-TYPE WALL HOLE

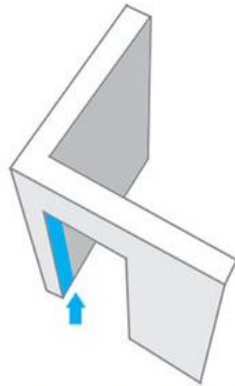


CORNER WALL TYPE HOLE


## Remark:

1. When measuring the thickness of the wall, please pay attention to whether the wall needs to be installed with ceramic tiles, reserved thickness of the decorative material.
2. T-type wall hole & corner wall type hole (blue area) --- Need to make a "fake wall" on the side of the flat wall before installation. The width is no less than 50-100mm, to prevent door frame installation failure or asymmetry.


## OPENING DIRECTION GUIDANCE




**A** Left Hand Inswing

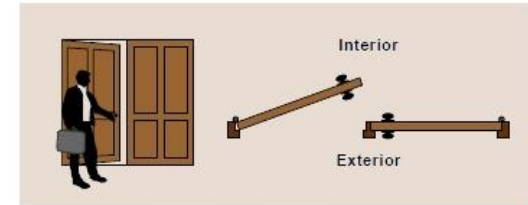


**A1** Left Hand Inswing Double Door




**B** Right Hand Inswing

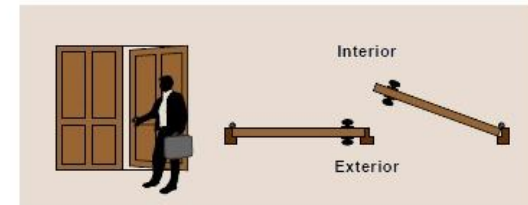


**B2** Right Hand Inswing Double Door




**C** Left Hand Outswing

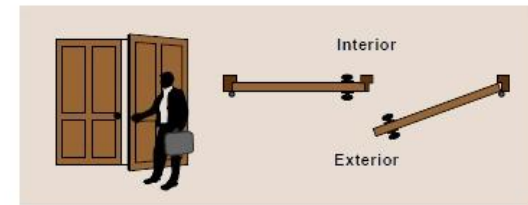

**C3** Left Hand Outswing Double Door



**D** Right Hand Outswing

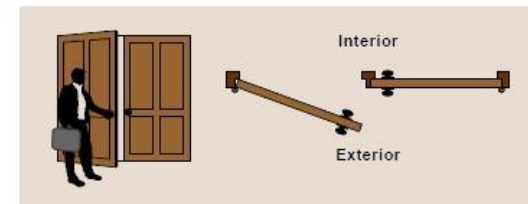

**D4** Right Hand Outswing Double Door

# DOOR INSTALLATION

Easily removed the old frame.




1. Use a tool to pry the door casing/architrave cover wire out of the bayonet



2. Remove the patch which connection the wall & door frame, and saw off door frame



3. Remove the door frame from the wall

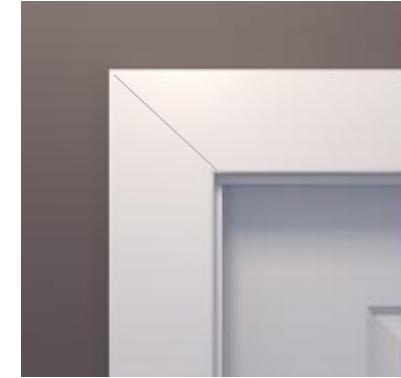


Door casing/architrave cutting type--45° & 90° compare

Easy installation of the new frame.




1. After adapting the skirting board to the new frame cladding, the frame is simply placed in the wall opening, aligned and with door frame fixed.

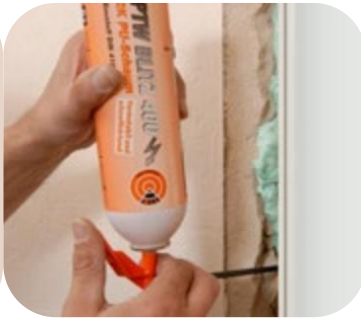

2. Professional assembly is continued with special assembly foam.



3. After the assembly foam has hardened the decorative cladding is inserted, the new door leaf is attached and the door handle is screwed on - done!

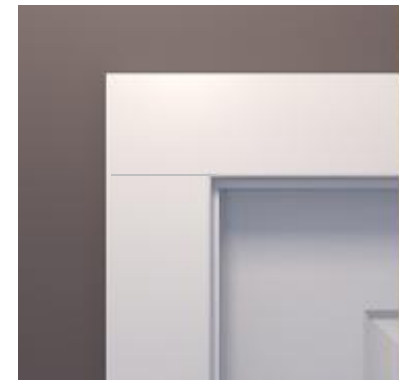

# HARDWARE SUGGESTION



哑黑色  
Dumb black



哑黑色  
Dumb black



拉丝银  
brushed silver



拉丝银  
brushed silver




拉丝金  
GB-gold brushed



24K 金  
24K gold

## Stainless steel series

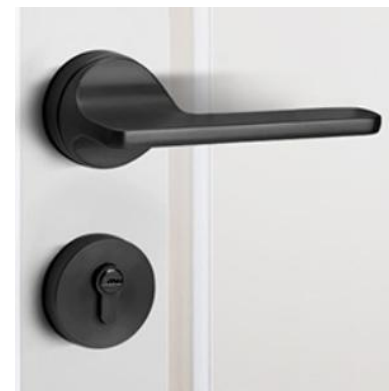

## Zinc alloy series



## Bronze with wood handle

